


(NEUTRAL = "o-d-ek")

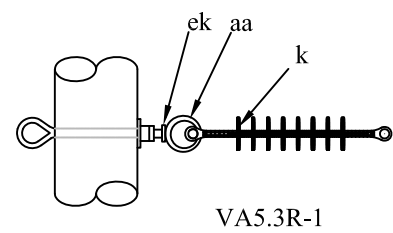

(NEUTRAL = "aa-ek")

Notes:

1. See Assembly Drawing VA5.1R
2. See Tying Guide Drawing VL1.2G
3. When connecting to existing bolt end, use "R-1" assemblies.
4. If above assemblies used for primary angle assembly:
 - (a) Rotate eyenut "o" 90 degrees and install anchor shackle "bo" in VA5.3.
 - (b) See Drawing VA3.1 and Tying Guide Drawing VL1.1G.

	UNIT VA5	.2R	.3R	.2R-1	.3R-1	
ITEM	MATERIAL	QTY	QTY	QTY	QTY	PART #
d	Washer, Curved 3"	2	2			9092
k	Epoxilator 18.75	1	1	1	1	4280
o	Bolt, Eye, 5/8" X Reg'd Length	2	2			9368
aa	Nut, Eye, 5/8"			2	2	4340
ek	locknuts	2	2	2	2	9096
eu	extension, link	1		1		4281

DESIGN PARAMETERS:

ALLOWABLE LONGITUDIAL OR TRANSVERSE LOAD
=5000 lbs / conductor

SINGLE PHASE DEAD ENDS

02/05/13	 A Touchstone Energy® Cooperative	VA5.2R VA5.3R
Rev. 0		